



DELIVERED WITH PRIDE

YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com

LED SOLAR PANEL LIGHT



Product Name: YL-SPS040

Issue Date: 2013-07-24

Quality Department	Engineer Department	Producer
Sam Zhang	Zhang yu wang	feng min Fu

➤ **Features**---a variety of functions

Home solar rechargeable lights bring permanent benefit: camping lamp, outdoor flashlight, household bulb lamp, table lamp, light bulbs, deck lights, wall night, study lamp, remote control lights emergency lights.

Our four bulb solar system is designed for the area with lack of power, and with this system, you have the added function of be able to use as portable flash lights in an emergency, all bulbs can be detached from there power holders and used in the case of emergency or to move around making the light accessible to all areas.

Our system come complete with all cable and installation instructions, packed in gift boxes, ready for any household.



DELIVERED WITH PRIDE

YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com


➤ Product Specifications

Model No.	YI-SPS040
Voltage	DC5-24V
Frequency	50/60HZ
Led	33 Leds
Battery	Lithium battery
Charge Time	5-6Hours each
Luminous Flux	260-280Lm Each
LED Lifetime	40,000Hours
Battery Discharge Time	6-10hours
Switching	DC-OFF-IR
Base	E27
Housing Material	PC
Dimensions	60*115-140mm
Color Temperature	3000K/6500K
Solar panel	12-14W
Quality Guaranteed	2 Years
Inner Box Dimensions	550*450*65mm
Packing	Color box
Weight of per box	3Kgs
Carton size	550*450*350mm
Weight Per Carton	15Kgs

➤ Usage Instruction

The bulb is only to be used with DC5-24V, When connecting use DC-Switch to IR position-Use remote to switch on/off; When Switch on DC-can be used as Torch connect to solar panel for charging. Replace End Dust cap and can be used as Torch or for handing position, when indicator LED is RED battery charging-When Fully Charged Indicator Turns Green.

➤ Solar panels feature curve:

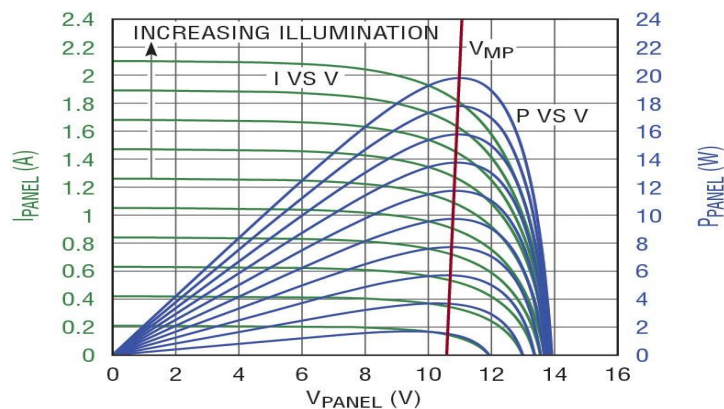




DELIVERED WITH PRIDE

YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com

➤ **Product Dimensions:**

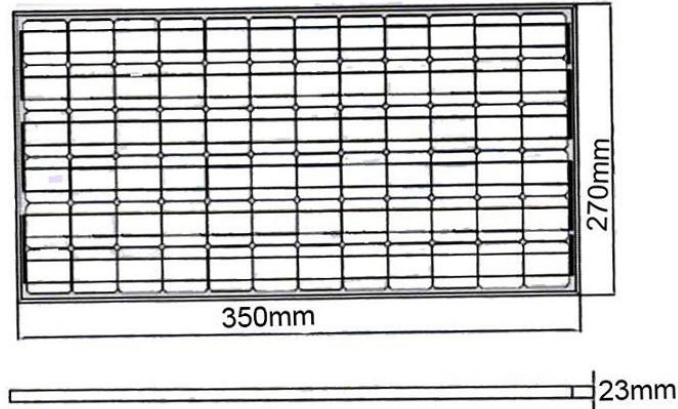

➤ **Electrical Connection:**




➤ **Method of application**


Usage of draw bar




① Rotate draw bar towards anticlockwise position to extend



② Pull out draw bar



③ Rotate draw bar towards clockwise position to lock in place

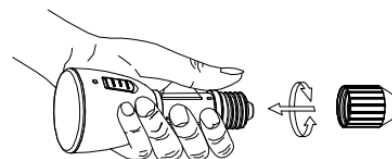

④ Rotate on protective cover towards clockwise position.




DELIVERED WITH PRIDE

YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com

➤ **Switch**

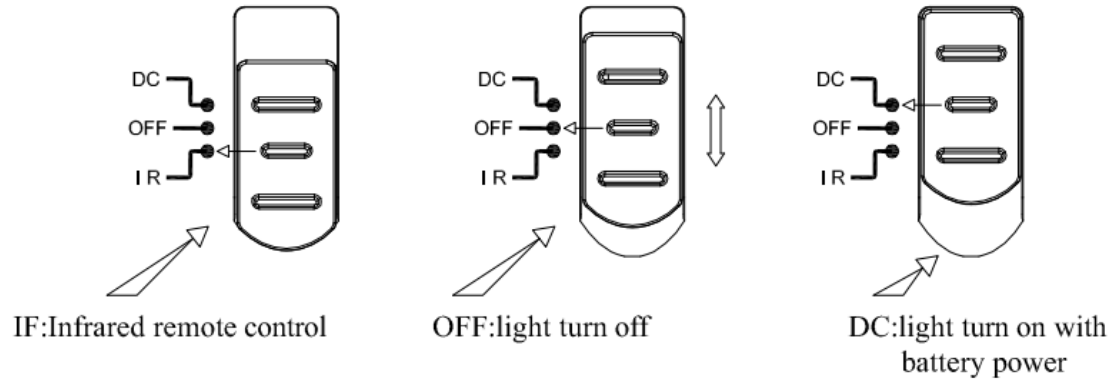

➤ **Packing:**

